

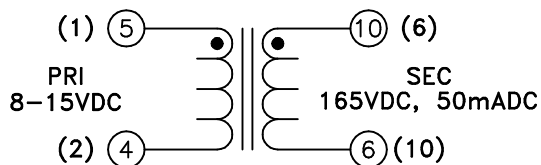
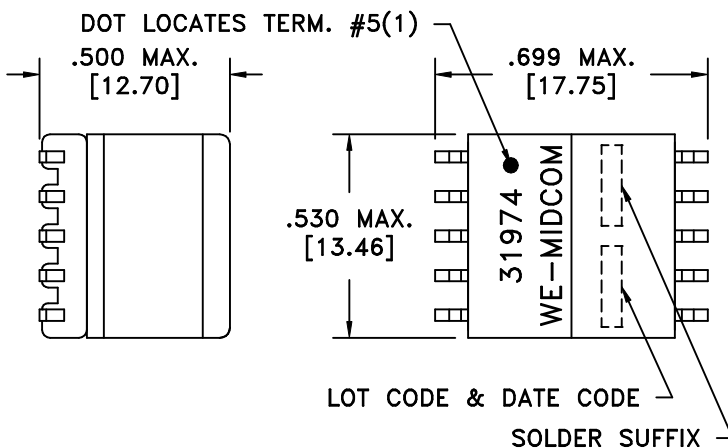


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6B)
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	Yes	

TERM. NO.'s FOR REF. ONLY
CUSTOMER TERM. NO.'s IN ()

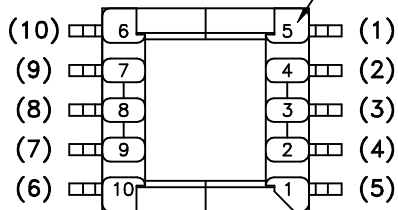

AREA REPRESENTS
TERMINAL PAD DIMENSIONS

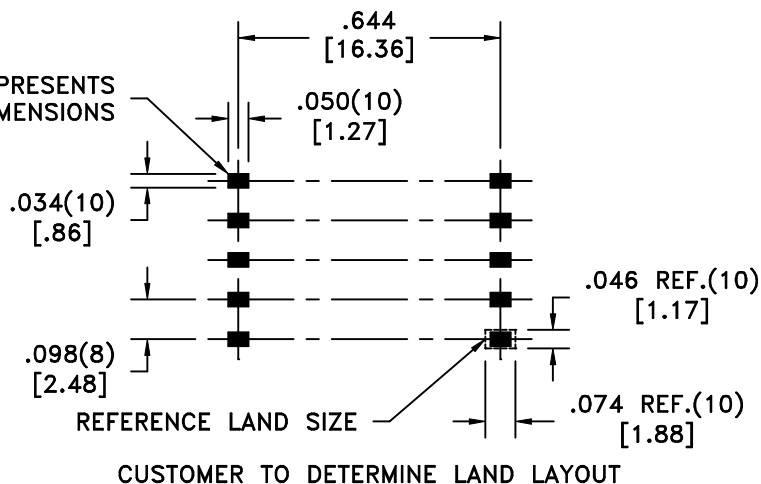

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 5-4, 0.023 ohms ±25%.
10-6, 0.555 ohms ±25%.
- DIELECTRIC RATING: 500VAC, 1 minute tested by applying 625VAC for 1 second between 5-10.
- INDUCTANCE: 10uH ±10%, 100kHz, 100mVAC, 5-4, Ls.
- TURNS RATIO: (10-6):(5-4) = 5:1, ±1%.

DETAILS SUBJECT TO CHANGE

Midcom, Inc. Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified: Tolerances: Fractions: ±1/64 Angles: ±1° Decimals: ±.005 [.13]			DWG.# 31974R/-LF1
	DRAWING TITLE <h2 style="text-align: center;">TRANSFORMER</h2>	DRAWING NO. <h2 style="text-align: center;">31974R/-LF1</h2>	REV. 6C 10/06	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	REVISIONS: SEE SHEET 1	SCALE ---	SHEET 2 OF 5	