

# Surface Mount Directional Coupler

50Ω 810 to 960 MHz

## D20C



CASE STYLE: CA531-1  
PRICE: \$ 0.99 ea. QTY (20)

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

INPUT	4
OUTPUT	6
COUPLED	3
GROUND	1,2,5

### Features

- low mainline loss, 0.3 dB typ.
- excellent VSWR, 1.1:1 typ.
- excellent repeatability
- miniature low profile package
- aqueous washable

### Applications

- cellular
- PCS

**Available Tape and Reel at no extra cost**


Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000

### Directional Coupler Electrical Specifications

FREQ. RANGE (MHz)	COUPLING (dB)	MAINLINE LOSS <sup>1</sup> (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT <sup>2</sup>
		Typ.	Max.	Typ.	Min.		
810-960	19.4±1.4	0.3	0.5	15	7	1.1	1.0

1. Mainline loss includes theoretical power loss at coupled port.
2. 4W CW when operating with a 2.0:1 maximum VSWR on all ports.


### Outline Drawing

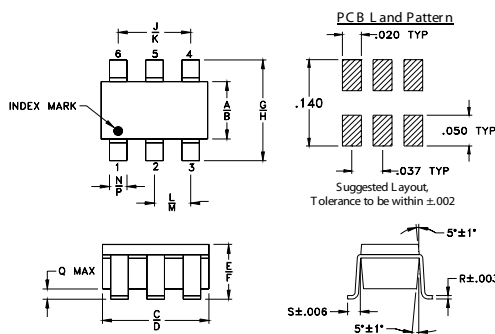

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.052	.067	.106	.122	.035	.064	.087	.118	.067
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70
K	L	M	N	P	Q	R	S	wt
.083	.033	.042	.012	.020	.012	.006	.018	grams
2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020

### Demo Board MCL P/N: TB-396+ Suggested PCB Layout (PL-270)



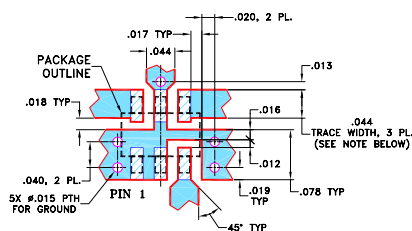


- NOTES:**
1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
810.00	0.32	20.15	15.42	29.31	32.09	32.06
815.00	0.32	20.10	15.43	29.27	32.02	31.93
825.00	0.33	20.00	15.44	29.17	31.91	31.69
855.00	0.34	19.71	15.49	28.87	31.70	31.05
875.00	0.34	19.51	15.51	28.80	31.59	30.69
895.00	0.35	19.33	15.50	28.80	31.44	30.26
915.00	0.35	19.15	15.48	28.68	31.15	29.79
935.00	0.35	18.97	15.48	28.51	30.84	29.34
955.00	0.36	18.80	15.49	28.41	30.60	29.00
960.00	0.36	18.76	15.50	28.37	30.54	28.92

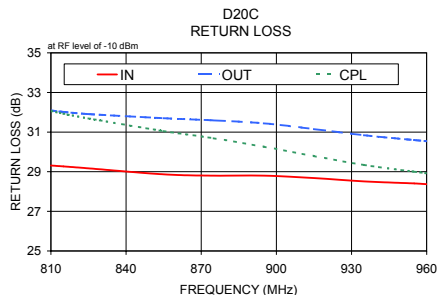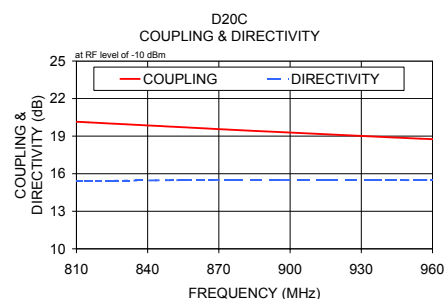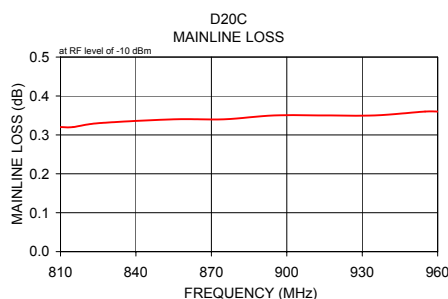

### Electrical Schematic

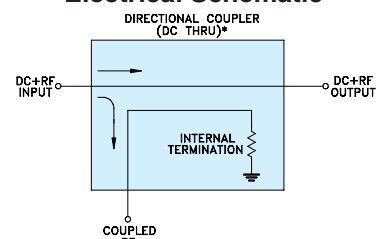

\* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLER THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.

### ESD Rating

Human Body Model (HBM): Class 1A (250 v to <500 v) in accordance with ANSI/ESD STM 5.1 - 2001  
Machine Model (MM): Class M1 (< 100 v) in accordance with ANSI/ESD STM 5.2 - 1999 (pass 50V)

**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)  
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. C  
M119986  
D20C  
JS/TD/CP/AM  
120607