

# 10/100 BASE PULSE TRANSFORMER

## P/N: UE-TS6121A DATA SHEET


### Feature

- 16 Pin SMD surface mount package.
- Dual channel low cost.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C								
Part Number	Turns Ratio		OCL (uH Min) @ 100KHz/0.1V with 8mA Bias Pins(1-3 / 6-8)	Cw/w (pF Max)	L.L (uH Max)	DCR (Ω Max)		HI-POT (Vrms)
	1-3:16-14	6-8:11-9				1-3/6-8	16-14/11-9	
UE-TS6121A	1CT:1CT	1CT:1CT	350	28	0.5	1.1	0.9	1500

Continue										
Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)				Cross talk (dB Min)	CMR (dB Min)	DCMR (dB Min)		
	0.3-100 MHz	0.3-30MHz	40MHz	50MHz	60-80MHz	0.3-100MHz	0.3-100MHz	30MHz	60MHz	100MHz
UE-TS6121A	-1.1	-18	-15.5	-13.0	-12	-38	-40	-42	-37	-33

### Schematic

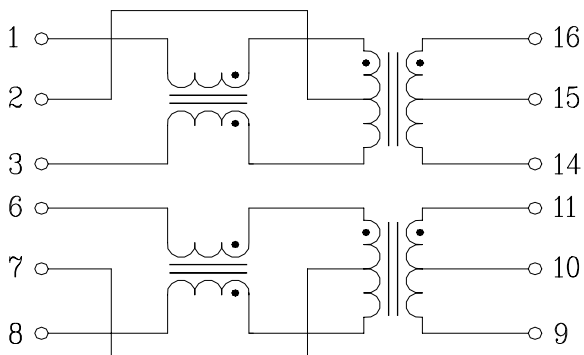

### Mechanical

